

ANCHOR SYSTEM & MOORING SYSTEM

DEUTSCH


ANKERSYSTEM

1. EINZELTROMMELWINDE 18 TONNEN MIT STAHLDRAHT - 4 Stk.
2. HYDRAULISCHE ANTRIEBSEINHEIT (HPU) - 2 Stk.
3. SCHWENKBARE LEINENFÜHRUNG - 4 Stk.
4. ANKER DELTA FLIPPER 2 TONNEN - 4 Stk. + 5 TONNEN - 4 STK.
5. ANKERGESTELL FÜR DELTA FLIPPER 2 TONNEN + 5 TONNEN
6. ANKERBOJE.


ENGLISH

ANCHOR SYSTEM

1. SINGLE DRUM WINCH 18 TONS WITH STEEL WIRE - 4 PCS.
2. HYDRAULIC POWER UNIT (HPU) - 2 PCS.
3. SWIVEL HEAD FAIRLEAD - 4 PCS.
4. ANCHOR DELTA FLIPPER 2 TONS - 4 PCS. + 5 TONS - 4 PCS.
5. ANCHOR RACK FOR DELTA FLIPPER 2 TO. + 5 TO.
6. ANCHOR BUOY.

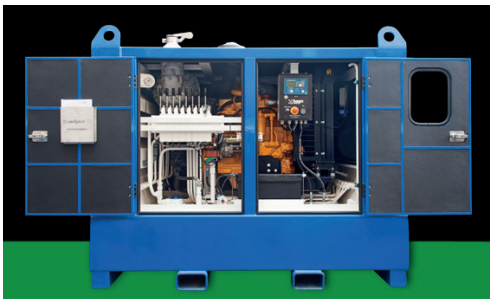


Hydraulische Antriebseinheit (HPU) /
Hydraulic Power Unit (HPU)

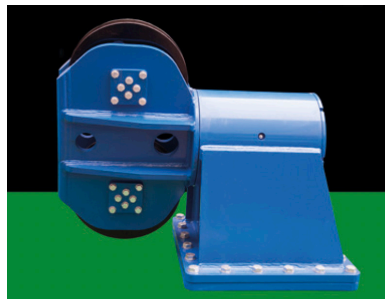

Schwenkkopf zur Leinenführung /
Swivel head for line guidance



Einzeltrommelwinde 18 to. /
Single drum winch 18 to.

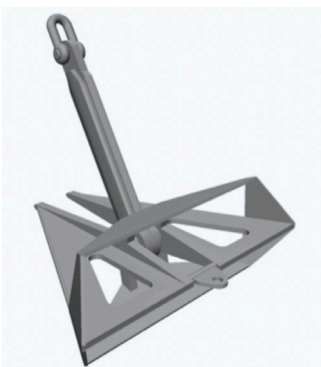

Anchor Delta Flipper 2000 kg
auch als 5000 kg Anker
vorhanden (4x)



Ankergestell / Anchor rack
(Anchor Delta Flipper 2000 kg)



Ankerboje / Anchor Buoy

ANCHOR SYSTEM & MOORING SYSTEM DATENBLATT/DATA SHEET



DEUTSCH

ANLEGESYSTEM

1. EINZELTROMMELWINDE 18 TONNEN MIT STAHLDRAHT - 4 Stk.
2. HYDRAULISCHE ANTRIEBSEINHEIT (HPU) - 2 Stk.
3. SCHWENKBARE LEINENFÜHRUNG - 4 Stk.

Technisch Merkmale

DRAHTZUG IN DER ERSTEN LAGE: 18 TONNEN

BREMSENHALTEKRAFT: 27 TONNEN

STAHLDRÄHTE: • LÄNGE: 500 METER
• DURCHMESSER: 28 MM

ENGLISH

MOORING-SYSTEM


1. SINGLE DRUM WINCH 18 TONS WITH STEEL WIRE - 4 PCS.
2. HYDRAULIC POWER UNIT (HPU) - 2 PCS.
3. SWIVEL HEAD FAIRLEAD - 4 PCS.

Technical characteristics:

WIRE TENSION IN THE FIRST LAYER: 18 TONS

BRAKE HOLDING FORCE: 27 TONS

STEEL WIRES: • LENGTH: 500 METERS
• DIAMETER: 28 MM

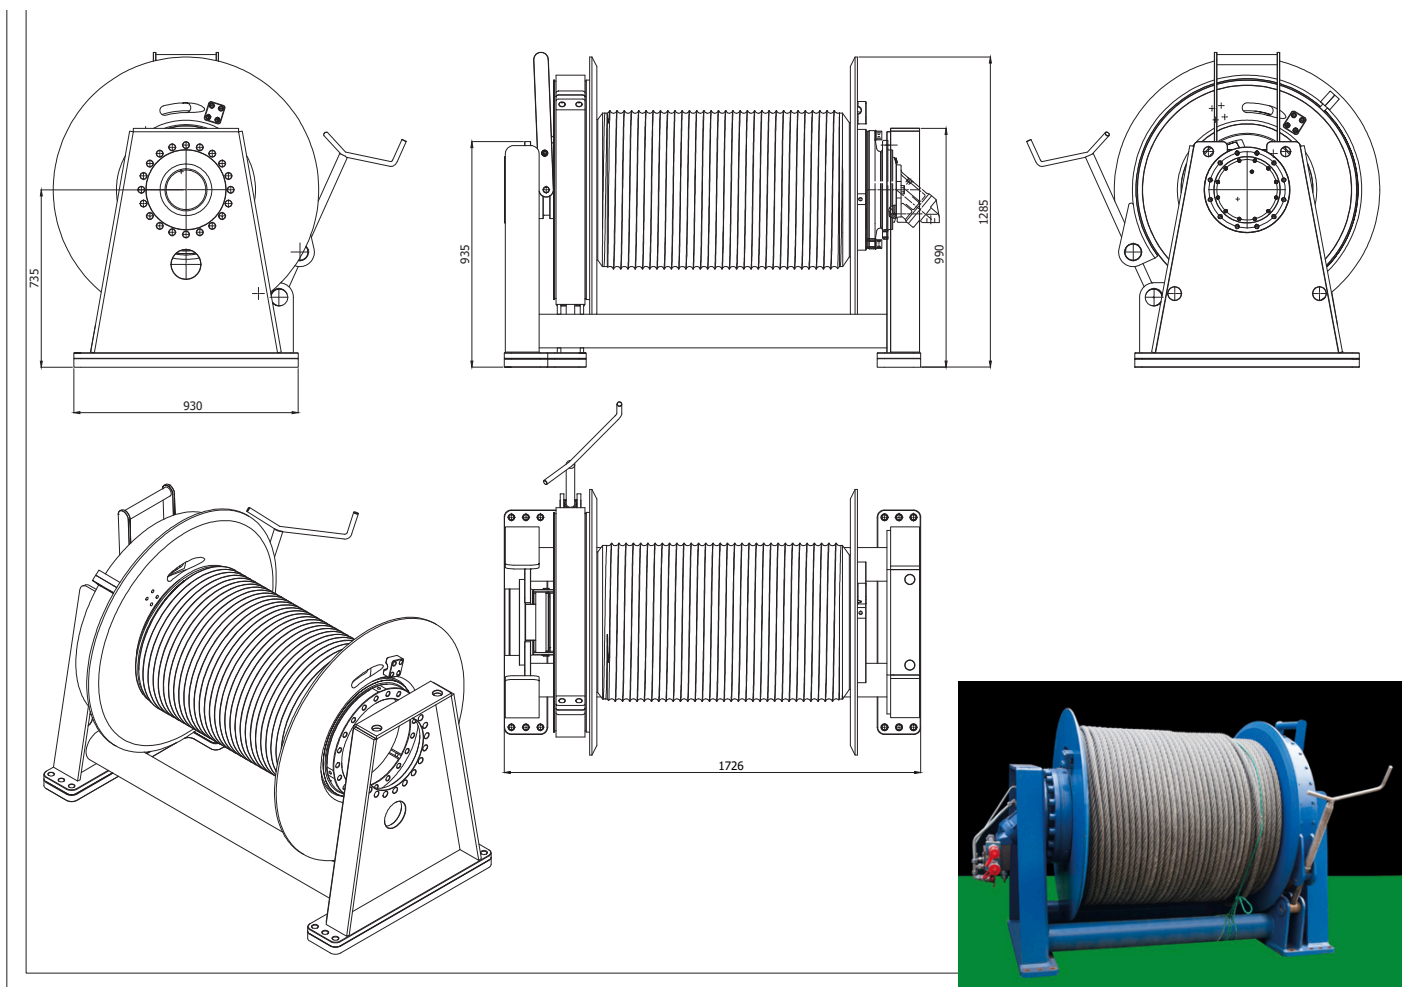

Single drum winch 18 to.

**BVT Chartering
und Logistics GmbH**
Kühlhauskai 3
27572 Bremerhaven

Managing Director
Arndt Lohner
Project Manager
Jörn Haumüller

Phone +49 (0)471 300130 -0
E-Mail ship-bvt@bvt-chartering.de
www.bvt-chartering.de